

P1500G

Surface Mount Housing With Gasket



P1500G


Inside Dimensions: H: 14.1" X W: 10.0" X D: 5.25"



P1500G Side View



P1500G Front View

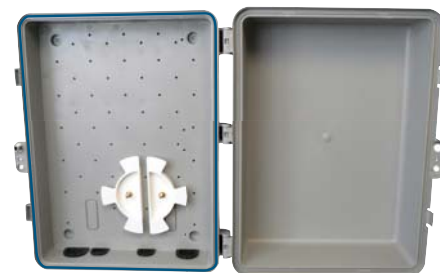

P1500G
with Optional Fiber Cable Spool

Features

4 Entry Ports: Two 3/4" & Two 1" diameter • Equipment mounting holes • Gasket Seal • 2 Base Knockouts • Dual snap lid locks • Large Inner cavity allows ample room to work in • FTTP, FTTH, Telecom, CATV or custom applications • UV Stabilized, Flame Retardant Polymer

Options

4 Port Placement Available at Top (for Indoor Use Only) or Bottom of Housing • Gasket Seal • Override lock, custom security screw, F81 lock or self tapping screw • Conduit Adapters, Grommets • 3 Available Polymer Types • Flame Retardant Rigid or Softer Non-flame Retardant Polymer • Network Equipment is Isolated From Customer Access Using Dual Compartment Option

** Custom hardware and private labelling are available by special order*