

# P3000

**PRIMEX**  
MANUFACTURING

## STRUCTURED WIRING ENCLOSURE – ABS

IDEAL FOR WIRELESS DEVICES– NO INTERFERENCES

### FEATURES:

- 4 Knock out entry points at the bottom – 3 x 1.00" and - 1 x 1.25"
- 2 x AC standard receptacles mounting ports
- 10 entry knockout points at the top - 8 x 1.00" & 2 x 1.25" conduit adapters
- Polymer is rust and dent proof
- Ample room to work in
- Houses both cable and telecom service provider equipment in one location for easy service and hook-up
- Flush mount enclosure fits between 16" studs
- Flame Retardant ABS Polymer Material

### APPLICATION



- The 30" enclosure provides a central location for cable & telephone services distribution set runs for residential & commercial premises.
- Mounting hole pattern accommodates 1/4, 1/2 & full length expansion modules in both vertical & horizontal arrangement
- Compatible with most standardized patch panels, voice, data, video & audio quick connect distribution modules.

### Inside Dimensions:

H: 30", W: 14.0", D: 3.5"



\* Custom hardware and private labelling are available by special order

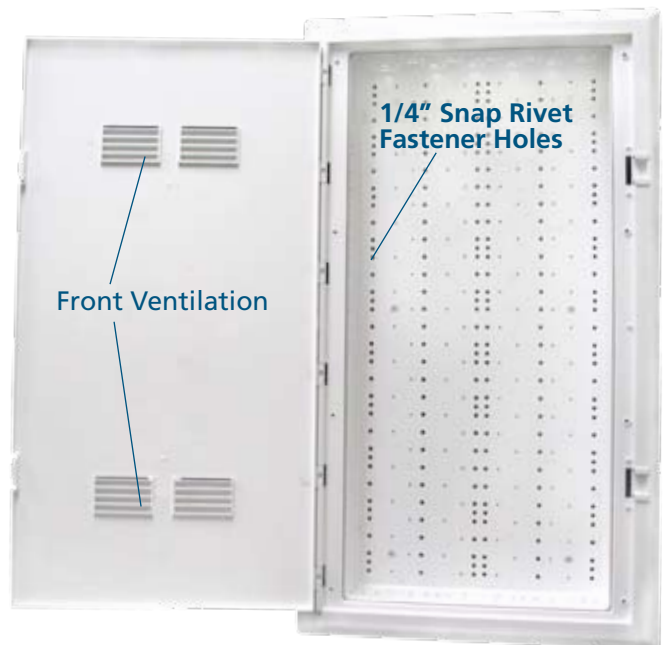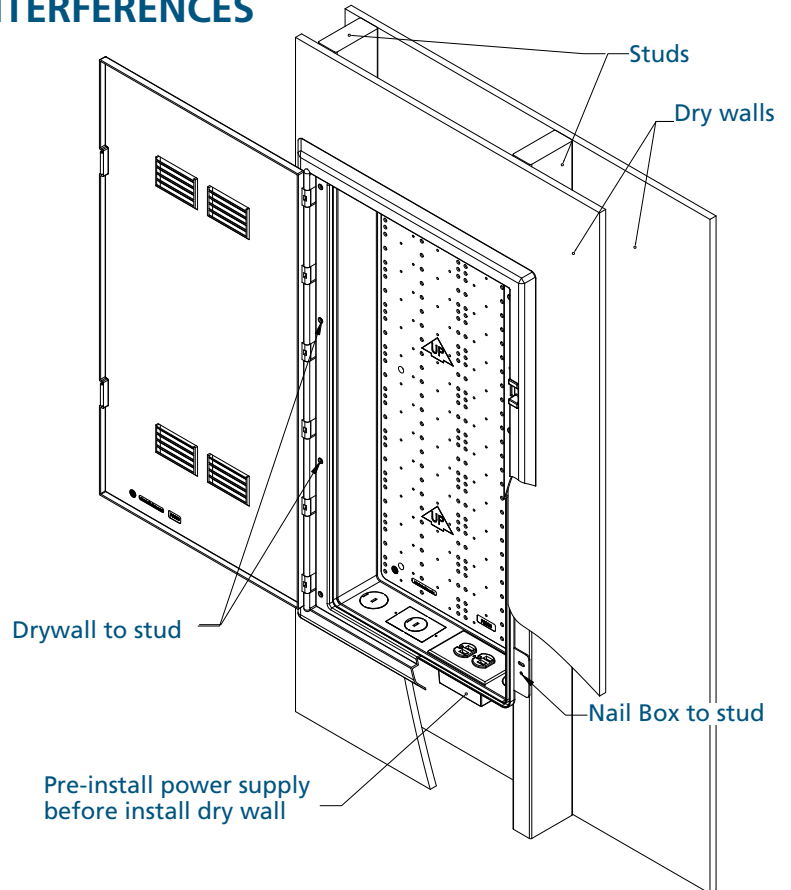


**PRIMEX MANUFACTURING USA**  
TEL: (360) 332 3100  
FAX: (360) 332-3200

**WWW.PRIMEX.CA**  
**SALES@PRIMEX.CA**  
TOLL FREE: 1-877-881-7875  
FAX: 1-877- 881-7835

**PRIMEX MANUFACTURING CANADA**  
TEL: (604) 881-7875  
FAX: (604) 881-7835

## STRUCTURED WIRING ENCLOSURE

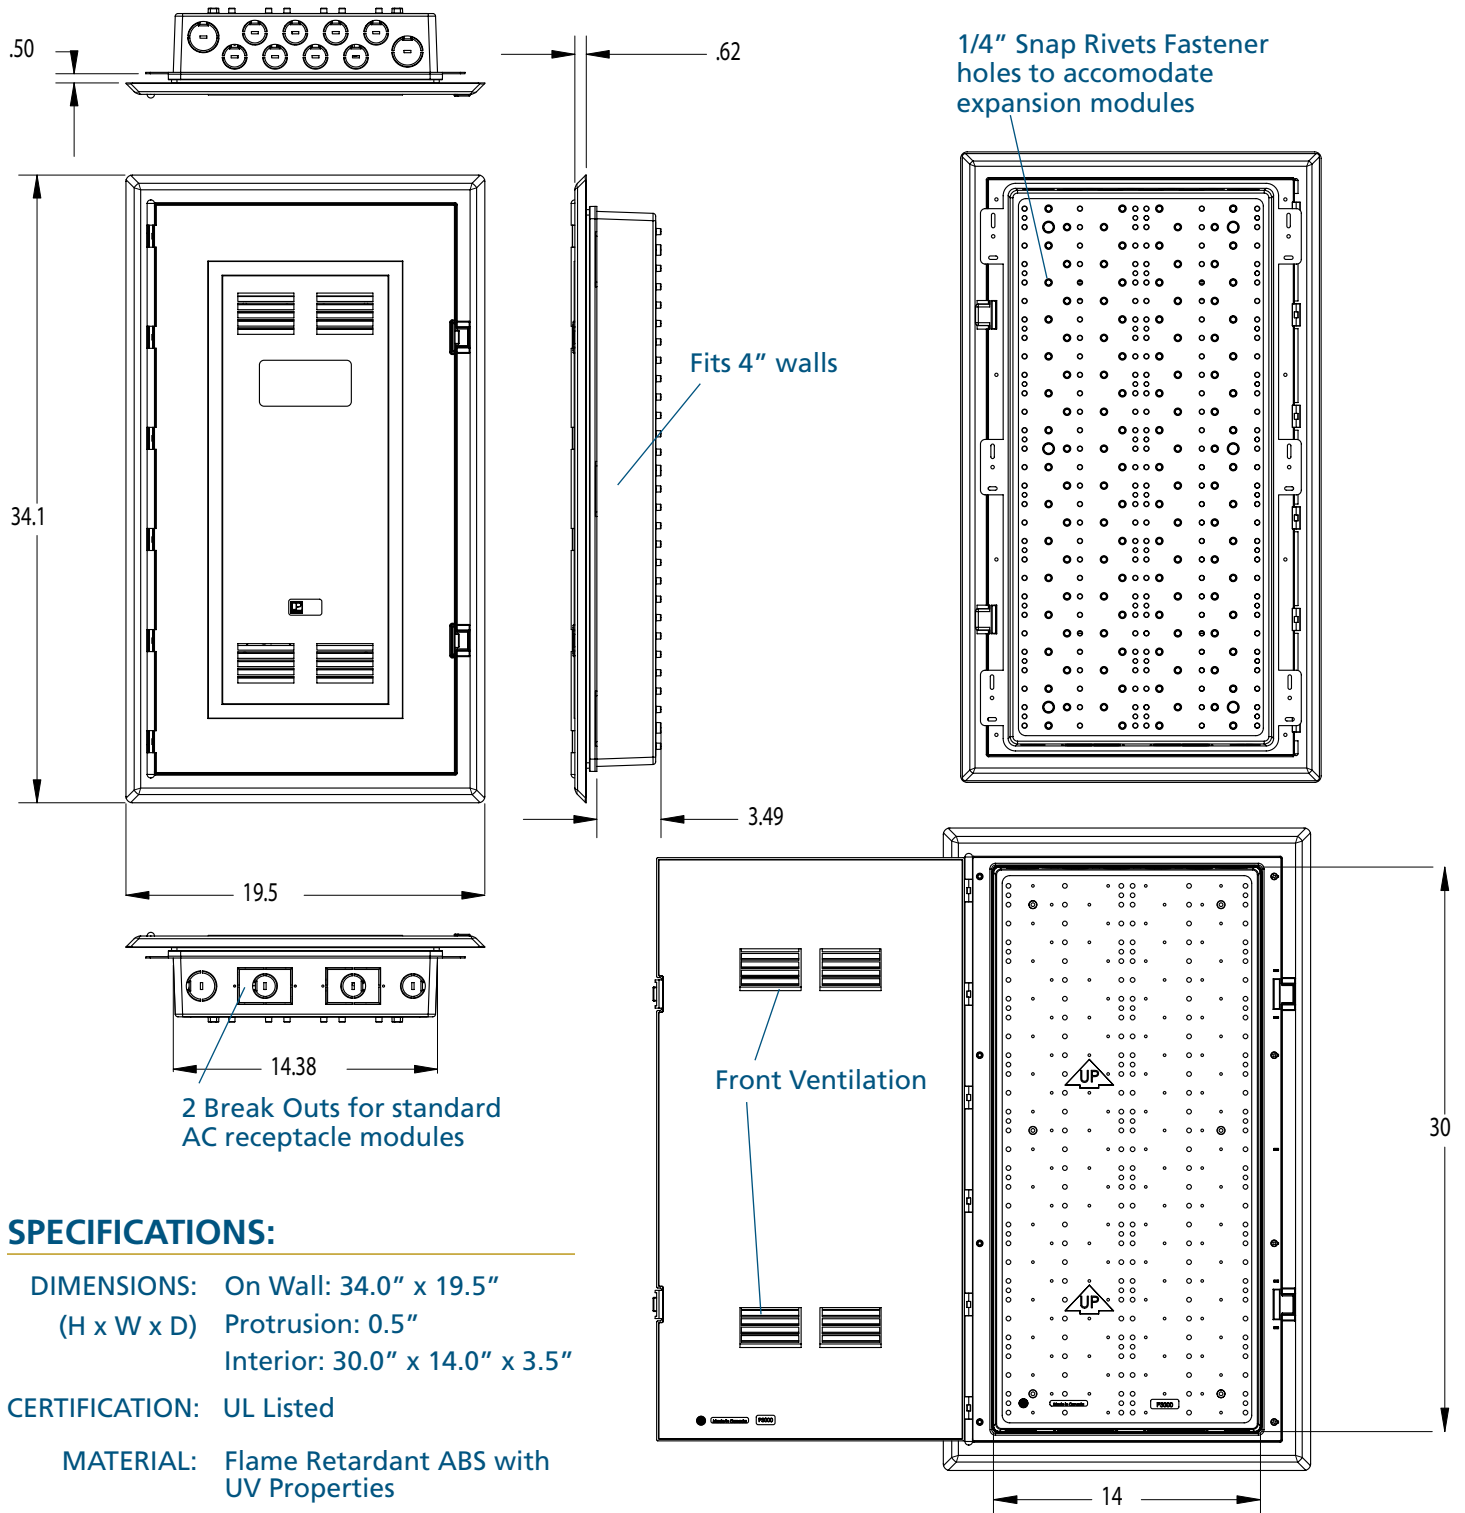

### SPECIFICATIONS:

**DIMENSIONS:** On Wall: 34.0" x 19.5"  
(H x W x D) Protrusion: 0.5"  
Interior: 30.0" x 14.0" x 3.5"

**CERTIFICATION:** UL Listed

**MATERIAL:** Flame Retardant ABS with UV Properties